

Simplification of animal identification.

The Live!D panel reader is an antenna and reader in one.

Easy to handle, install and use. For fixed installations or on the move. No RFID knowledge necessary for setup.


The panel reader is made from robust material, 4 times more durable to abrasion than stainless steel. Also the panel reader contains LED indication which displays performance. Bright flashing LEDs for positive readings.

Large memory capacity for up to 900.000 numbers. Numbers are stored with timestamp and optional GPS location.

Both Ethernet and RS232 connection are integrated. Optional Bluetooth and GPS are available

Highlights of the Panel Reader:

- No RFID knowledge required
- Easy to handle, install and use
- Bright LEDs for functionality check
- Extremely durable material (HMPE)
- Excellent reading performance
- Large memory, no need to delete numbers
- Web-based, no need to install software
- Capable of connecting to RS232 weighing computers
- Reads ISO 11784/11785 HDX and FDX

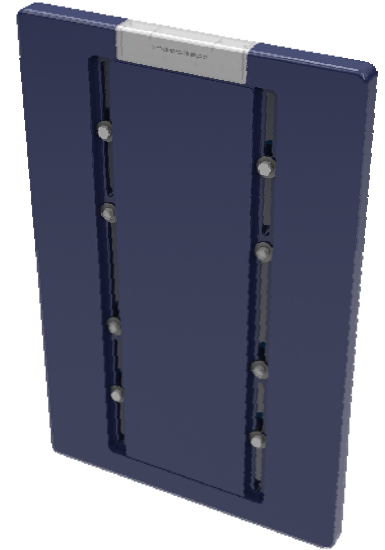

Specifications

L x W x H (mm) : 595x395x30
Voltage: 12-48 volt
Ethernet
RS232
GPS integrated (optional)
Bluetooth integrated (optional)
Auto tune
IP67

Specifications are subject to change without prior notice